

IV. ECOMONITORING

DEVELOPMENT OF A WEB GEOPORTAL FOR THE WATERSHED OF YANTRA RIVER THROUGH OPEN SOURCE SOFTWARE

Tanya Trenkova

Abstract: The advance in the web mapping technologies enabled the generation and use of vast amount of spatial data. First and foremost, challenge is the extraction of appropriate information from the excessive data overload. In this respect the needs of web-based GIS applications for fast and easy dissemination, display and sharing of spatial information are constantly growing. The work investigates some geovisualization techniques for user friendly data representation. A framework containing different data types is elaborated related to the utilization of spatial datasets for Yantra River Basin area. The prototype is developed to serve as a data-viewer for various users.

The goal is to provide a comprehensive visualization tool for gaining better understanding from the available spatial data for the case study area. The application enables users to view, natural resources information for specific needs. The approach integrates only open source technologies for the development of the web-based GIS applications and tools serving to disseminate the data through the web. Flexibility, extensibility and interoperability of the open source software proves the necessity and benefits of the open source solutions within multi-aspect environments.

Keywords: web-based GIS applications, Open Source Software, geovisualization

INTRODUCTION

Geospatial information redundancy in the last decades has led to a rapid development of great variety of geospatial approaches, tools and applications used in a wide range of different fields. Information and Communication Technologies (ICTs) play a critical role in this development and affect business, industry and people's daily lives. The vast amount of generated data through the advanced ICTs as remote sensing - satellite-borne observations and measurements, Global Positioning Systems (GPS), Digital Photogrammetry, internet-based sensors etc. has reflected in growing social impacts and benefits in knowledge, management and decision making processes. The technical advances in hardware, software and data management have been fundamental for the geo-visualization development. The geo-visualization combines the strengths of the human creativity and general knowledge with the computational power of present-day computers to explore the knowledge from large geospatial datasets. A driving force for geo-visualization progress is the rapid development of internet-based applications and the use of Internet as a medium for dissemination of geospatial data and maps. In general, the Web paradigm shifted from passive to intelligent web respectively, influencing the web services and content in order to fit the users' demands.

The study of different aspects of visualization requires a multidisciplinary and multidimensional analysis. In fact, the revolutionary innovation in geo-visualization has been made by the interactive maps

design, which leads to user's deeper involvement and expands data sharing processes, developing also the collaborative dimension of data visualization.

The collaborative effort to share data resources and development experience has been greatly increased through the Open Source paradigm. Two main organizations have been coordinating the development of the open specifications - the OpenGIS Consortium Inc. (OGC) [8] and the World Wide Web Consortium (W3C) [14]. In 1999, the Open Geospatial Consortium (OGC) has begun establishment of Web Map Services (WMS) standards. The OGC comprising hundreds of companies, universities and government agencies participating in the process of developing public standards supporting interoperable solutions for geo-web, location-based services and data flows. Strategic Goals of the OGC includes provision of free available standards, delivery and integration of geospatial content and services and support in creation of innovative applications for geospatial technologies [9].

The open standards approach coupled with open source software allows easier resource and experience sharing resulting in development of great number of customized applications. The Open-Source Systems have expanded in different directions covering the whole range of software applications and tools development.

Main driver for data standardization from a European perspective is the INSPIRE (Infrastructure for Spatial Information in Europe) directive (Directive 2007/2/EC) of the European Parliament

and of the Council [6, 4]. The goal of INSPIRE is to build an infrastructure for provision of harmonized spatial information across the members of the European Union (EU), supporting European and national environmental policies or activities, which may have an impact on the environment [7].

The current research work represents a visualization tool for a middle range river basin in Bulgaria.

STUDY AREA

The research area is located in the central northern part of Bulgaria, characterized by sloping alluvial basins. Yantra River is the second largest among the Bulgarian tributaries of the Danube river in terms of catchment area - 7 862 km² and with a length of 285 km (Fig. 1). The spring is at the foot of Atovo padalo peak in Shipchenska Stara planina mountain and the river flows into the Danube near the village of Krivina at an altitude of 18 m above the sea level (a.s.l.). The mean elevation of the river basin is 470 m. The altitude varies in a wide range, and 82,24 % of the watershed area is covered by lands with an elevation between 0 - 200 m, respectively 17,76% of the basin territory includes an area from 200 to 600 m a.s.l. [2].

The river has five major tributaries, which constitute one of the largest surface water drainages within the Danube Basin Directorate. The left tributaries are: Rositsa, Eliiska and Studena rivers, and the right ones - Dryanovska and Lefedzha [13]. Because of the low inclination (4,6 ‰) in the Danube Plain the main river meandering and has the highest tortuosity coefficient of 3,1 at the Bulgarian territory, especially in the region of Dolna Oryanovitsa, Varbitsa and Draganovo villages. The density of the river network varies from 0.7 km/km² for the main river to 1,5 km/km² for the upstream tributaries [3].

The water resources of Yantra river basin are characterized by a complexity of their use for water supply, irrigation, waterpower production and ecological purposes [1]. Yantra River high water occurs in March - May period when the snow melt and rainfalls over the catchment area are coupled, and the low water is during August-September period. The average discharge to the Danube River confluence point is evaluated at approximately 50 m³/s.

There are 16 hydrological stations over the whole catchment area - 3 along the main river, and the rest at the tributaries. Oak and beech trees cover 2250 km² of Yantra River drainage territory and the total forestation area is estimated at 28%.

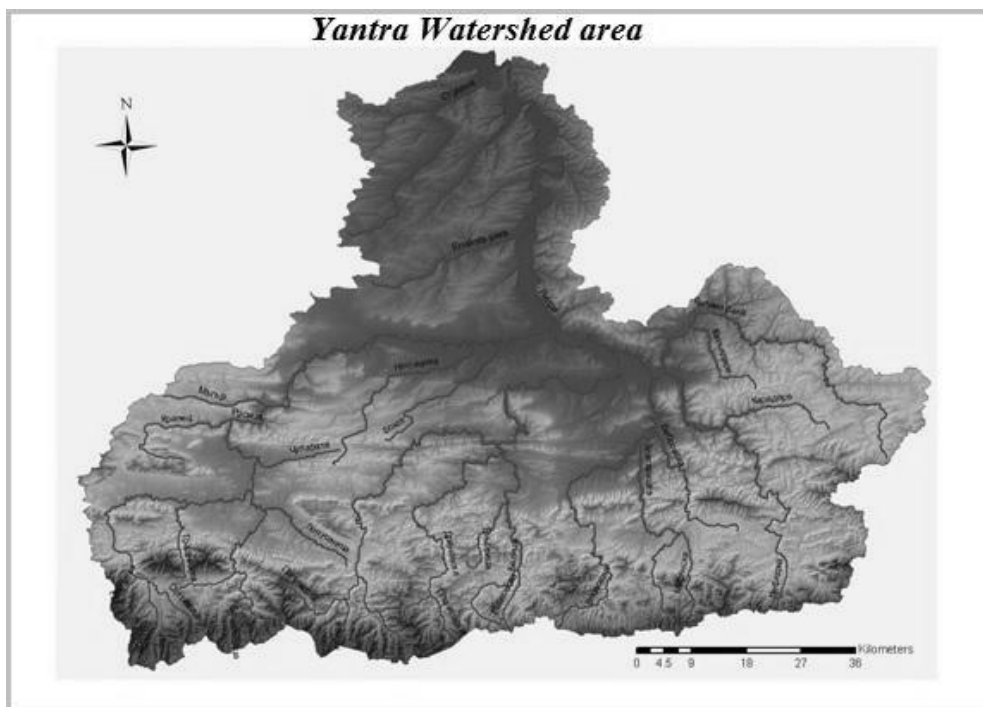


Fig. 1. Yantra watershed area

METHODOLOGY

The visualization is a complex process consisting of data processing phase (data selection, filtering, annotation, aggregation etc.), a phase of analysis (pattern detection, overlaying analysis, cluster analysis, index or indicators development, statistical or comparative analysis etc.) and finally the phase of

visual data representations.

Web application architecture is fundamental in building a customized web tools for visualization or other purposes. It involves the infrastructure for the web development. Most Internet map servers consist of a three-tier architecture for the system implementation (Fig.2).

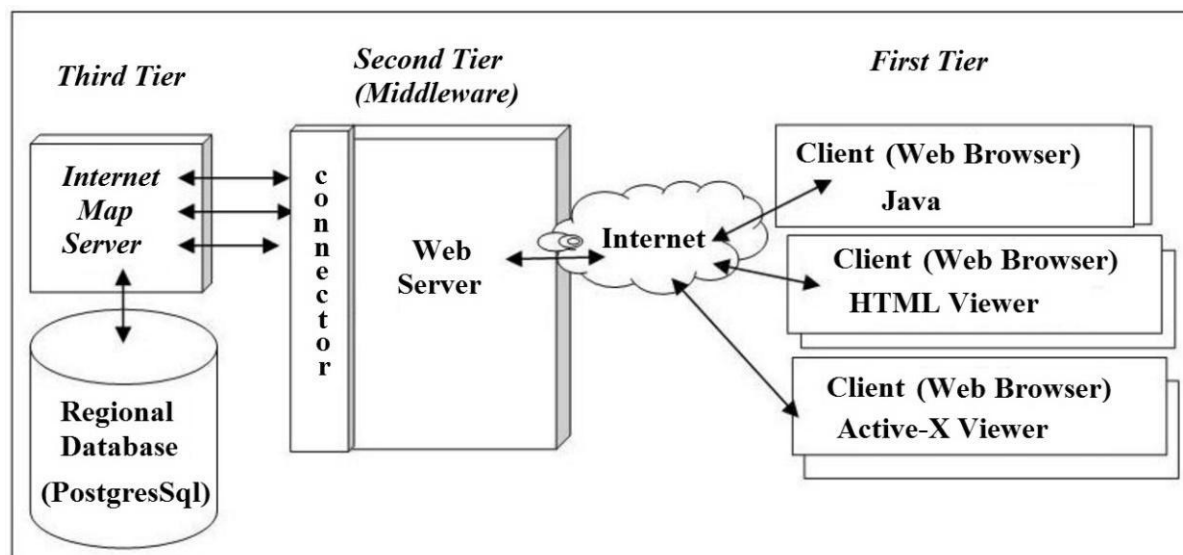


Fig. 2. System Architecture of a web-based Geoportal application [10]

The first tier is called “the client tier” and includes the user-side web browser and user HTML documents or Java applets. The client tier is used for making requests by the users and for viewing maps and remote sensing data. The second tier is the middleware tier that includes the Web Server and the Server to bridge the communication between clients and the map servers. The third tier is the data storage tier that includes the map server and the database server. The three-tier software architecture of web-based GIS provides customizable functions for different mapping applications and scalable implementation for different hardware [10].

RESULTS

A preliminary research has been done in order to choose a proper open source solution for the development of the web application. The abundance of the approaches makes the choice complicated. The open source combination that has been chosen for the data processing, the database, map server and the framework, with the respective libraries is the following:

- For data processing – **QGIS** version 2.12.3 Lyon
- For the Database – **PostgreSQL**
- For a Map Server – **GeoServer** version 2.8.1
- For a Web Mapping Application- **GeoExt** 1.1 (JS toolkit)
- Libraries: **OpenLayers** v.3, **Leaflet** v.1.0, **jQuery** etc.

The geospatial data are from wide range of data sources, obtained in different projects and in different time periods - JICA project, NATURA 2000, DIVA-GIS, WorldClim - Global Climate Data, and some additional projects [5, 11, 12, 15].

The proposed viewer has been developed for displaying mainly water related data. It contains also datasets with social-economic and environmental information. The architecture of the application consists of three subcomponents: RDBMS (Relational Database Management System), web-based mapping component and a website. The various datasets are preprocessed in **QuantumGIS** open source GIS software (Fig.3) and transferred to a database in **PostgreSQL** open source geospatial database [18, 19].

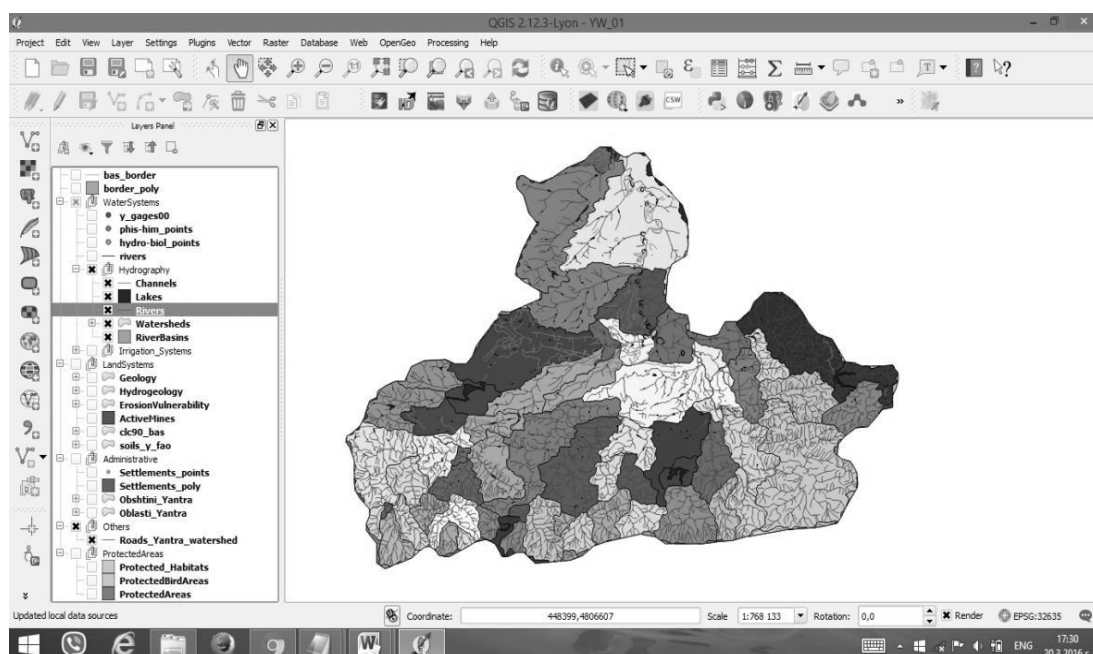


Fig. 3. Processed layers of Yantra River Basin Area in QuantumGIS

The datasets include vector and raster data. The visualization gives the opportunity to compare the various features of the watershed. The datasets are organized in thematic groups – Hydrography, Irrigation systems, Land Systems, Administrative etc.

The data are the heart of the hydrological modeling process. The inconsistencies or data gaps may lead to misleading or poor results. The geodatabase combines the geospatial data with the data repository to create a central data repository for spatial data storage and management. For the case study area, a geodatabase of Yantra river basin and its tributaries was developed. The geodatabase offers storage of rich collections of spatial datasets into a centralized location with respective data relationships and defined rules (topologies).

The geodatabase supports different types of GIS data, such as geographic features, attribute data, satellite images (raster data), GPS coordinates, survey measurements etc.

The data are in WGS 84 UTM Zone 35N projection (EPSG: 32635)

The data-layers from the database have been uploaded to the GeoServer – a java-based server providing a number of open standard services such as *Web Feature Service (WFS)*, *Web Map Service (WMS)* and *Web Coverage Service (WCS)* used in geospatial data processing [20]. The WMS service was used for the data-layers included in the viewer (Fig.4). The styling of the layers was accomplished using the *Styled Layer Descriptor (SLD)*. uDig open

source software was used for the processing of the SLD – files before uploading them on the GeoServer. The SLD-files generated in QGIS do not support the labeling function.

For building the framework different types of mapping libraries were used. The main library was **OpenLayers** JavaScript library which is used as an API for development of web-based geographic application. The OpenLayers is a client-side web mapping framework for integration of various data sources, among them Google Maps, Bing Maps, Yahoo Maps, OGC services, and many others [17]. OpenLayers is one of the most popular web mapping clients, used in both open-source and proprietary web mapping solutions.

The external portal is the public section of the portal used in the interaction with the public. It can be accessed from outside. The functionalities on the site are available for general public (without authentication) at the external portal. The application allows data access, visualization of a range of layers on the map, zooming and moving the maps, allows distance measuring, resources grouping and some functionality through a navigation bar. The base map could be changed into a satellite one or other type open source map (Fig. 5).

The JavaScript Toolkit GeoExt, which combines the geospatial functionality of the OpenLayers library and the user interface of Ext JS was used to build the GIS Web Mapping Application viewer on the web [16].

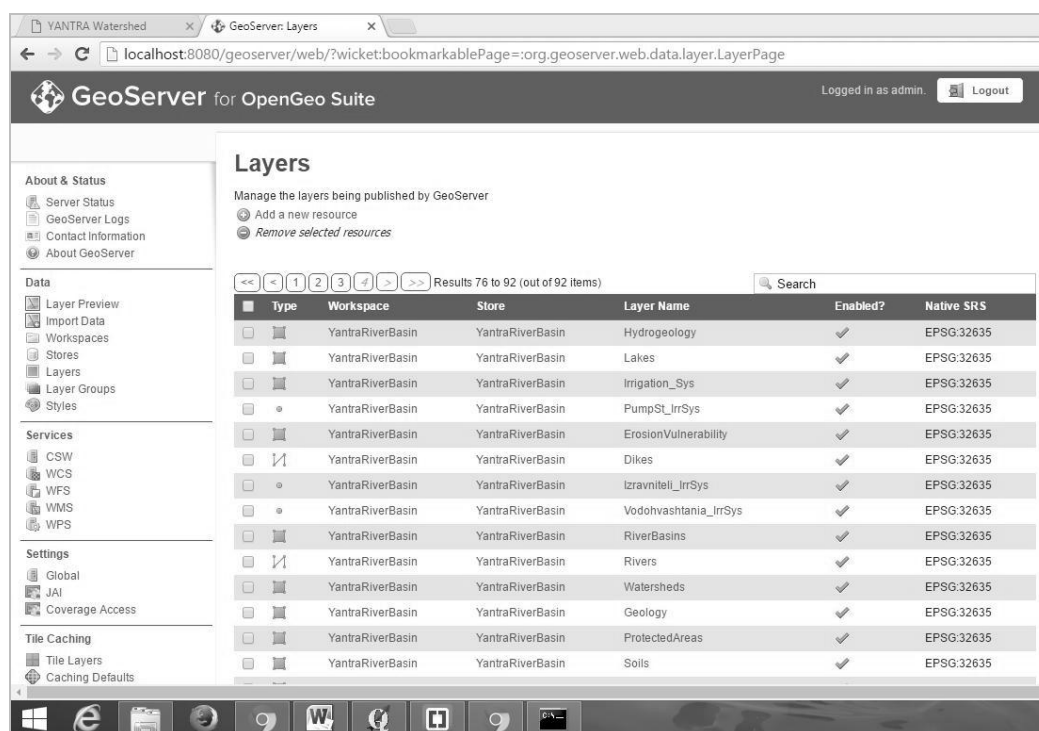


Fig. 4. Data layers uploaded on the GeoServer

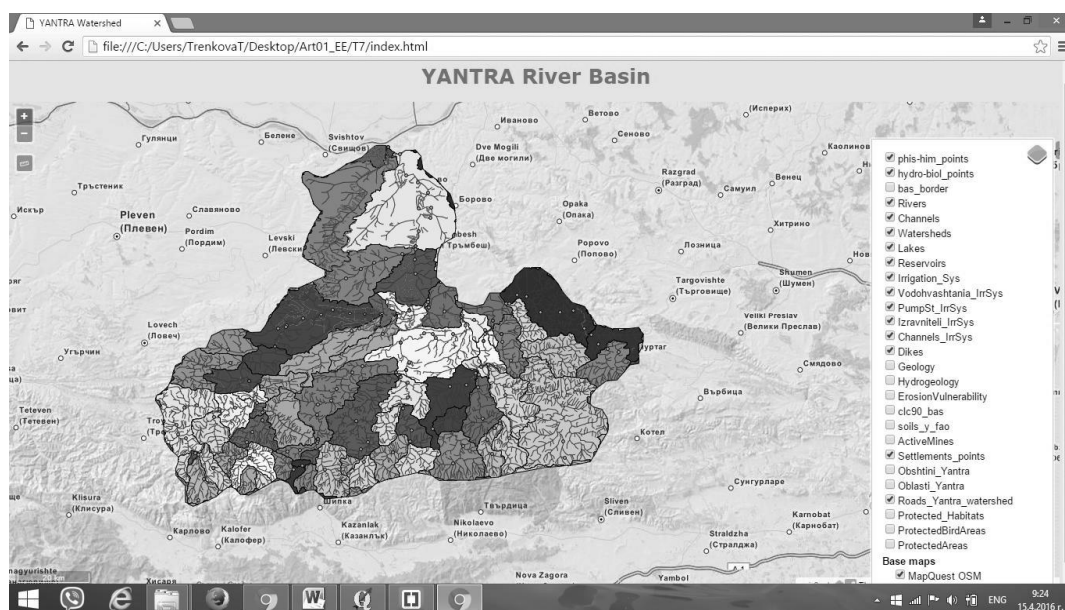


Fig. 5. A snapshot of the interface of the Geoportal with several activated layers

CONCLUSION

Data heterogeneity requires strict standardization rules for the available geospatial data in order to improve the interoperability between the various applications and the spatial data platforms. The OGC standards are applied to solve this issue.

The proposed prototype of the spatial data web-viewer is not a final version; some additional functionalities will be added in order to make it more useful for wider range of users with specific needs. It could be a part from a broader web-platform for Yantra River Basin case study area. It could be used for assessment of the natural

resources, evaluation of some environmental patterns, understanding of the environment, geology, topography etc. It could serve also as a platform for publishing data from future projects. The next steps are directed to development of additional modules for spatial analysis, hydrological modeling and forecasts, and adding interactive functionalities.

REFERENCES

1. Генерални схеми за използване на водите в България, Използване на водите и водостопански баланс на поречието на р. Янтра, 2000, колектив
2. Георгиев, М., Физическа география на България, "Наука и Изкуство", С., 1979
3. Мичев, Н., Михайлов Ц., Вапцаров И., Кираджиев Св., Географски речник на България, С., 1980;
4. Peterson, M.P., 2012, Online Maps with APIs and WebServices, Springer, p.92
5. <http://www.diva-gis.org/gdata>
6. <http://eur-lex.europa.eu/legal-content/EN/ALL/?uri=CELEX:32007L0002>
7. <http://inspire.ec.europa.eu/>
8. <http://www.opengis.org/>
9. <http://www.opengeospatial.org/>
10. <http://map.sdsu.edu/>
11. <http://natura2000.moew.government.bg/Home/Documents>
12. http://www.wabd.bg/bg/index.php?option=com_content&task=view&id=437&Itemid=56
13. <http://www.bd-dunav.org/content/upravlenie-na-vodite/plan-za-upravlenie-na-rechniia-baseyn/>
14. <https://www.w3.org/>
15. <http://www.worldclim.org/download>
16. <http://geoext.org/>
17. <http://openlayers.org/>
18. <http://www.qgis.org/en/site/>
19. <http://www.postgresql.org/>
20. <http://geoserver.org/>

РАЗРАБОТВАНЕ НА УЕБ-БАЗИРАН ГЕОПОРТАЛ ЗА ВОДОСБОРА НА Р. ЯНТРА СЪС СОФТУЕР С ОТВОРЕН КОД

Таня Тренкова

Абстракт: Напредъкът в технологиите за уеб картографиране доведе до генерирането и използването на огромни количества от пространствени данни. Най-важното предизвикателство е извличането на подходящата информация от свръх-претоварването с данни. В този смисъл нуждите от уеб-базирани ГИС приложения, за бързо и лесно разпространение, визуализация и споделяне на пространствена информация постоянно се увеличават. Настоящата разработка изследва някои техники за визуализация за достъпно представяне на данни на потребителя. Разработена е структура съдържаща различни типове данни, свързани с използването на набори от пространствени геоданни за водосбора на р. Янтра. Прототипът е разработен, за да служи на различен тип потребители.

Целта е да бъде създаден достъпен инструмент за визуализация, който да дава възможност за по-добро запознаване с изследваната водосборна област, чрез наличните геопространствени данни. Приложението позволява на потребителите да визуализират информацията за природните ресурси в зависимост от специфичните им нужди. За разработването на уеб-базирани приложения и инструменти са използвани само софтуерни технологии с отворен код. Гъвкавостта, възможността за разширяване и оперативната съвместимост на софтуера с отворен код доказва ползите и необходимостта от повече софтуерни решения с отворен код в многообразни области на приложение.

Ключови думи: уеб-базирани ГИС приложения, софтуер с отворен код, геовизуализация

Таня Тренкова, НИГГГ-БАН

ул. Акад. Г.Бончев, бл.3, ст.333
София – 1113
Тел. 02/ 979 3377
Мейл: trenkova@mail.bg

Tanya Trenkova, NIGGG - BAS

Acad. G.Bonchev, str., bl. 3, r. 333
Sofia - 1113
Tel. 02 979 3377
Mail: trenkova@mail.bg